

# BASCO

## Intermediate Bulk Containers Accessories and Replacement Parts



**POLY VALVE**



**HOSE KIT**



**FILL CAPS**



**INSULATED COVER**



**Intermediate Bulk Container (IBC)**



**METAL VALVE**



**POLY VENT CAP**



**DUST CAPS**



**FUSIBLE VENT CAP**

# Definitions & Index

**Ball Valve:**

A valve that opens by turning a handle attached to a ball inside the valve. The ball has a hole, or port, through the middle so that when the port is in line with both ends of the valve, flow will occur. When the valve is closed the hole is perpendicular to the ends of the valve and flow is blocked.

**Check Valve:**

A one-way valve that is being required by the EPA on all refillable IBCs that are being used to hold and transport pesticide.

**Composite IBC:**

A rigid IBC designed for mechanical handling, comprised of a plastic inner receptacle surrounded by a metal frame that holds the inner receptacle in place and is affixed to a pallet.

**Dust Cap:**

A cap that has either a female NPT thread or a female QD system that is applied to the end of a valve to ensure the valve does not become contaminated with dust and dirt.

**EPDM:**

Ethylene Propylene Diene Monomer rubber.

**Intermediate Bulk Container (IBC):**

A rigid or flexible portable packaging, other than a cylinder or portable tank, which is designed for mechanical handling. The capacity of the container ranges from >450 L to 3,000 L (118 gallons to 792 gallons).

**Marking Plate:**

Steel or plastic plate that is usually rectangular in shape that is fitted on the metal cage of composite IBCs for product information and UN labels.

**Minibulk:**

A term used in the Agriculture industry that describes both Composite IBC and Rotational molded Intermediate Bulk Container.

**National Pipe Thread (NPT):**

A US standard on tapered threads used on threaded pipes, valves and fittings.

**Polypropylene (PP):**

Naturally translucent plastic that provides an excellent moisture barrier. Polypropylene has excellent chemical resistance, but provides poor impact resistance in cold temperatures.

**PTFE:**

Polytetrafluoroethylene is a synthetic fluoropolymer; commonly known as Teflon® it is resistant to corrosive chemicals.

**Quick Disconnect (QD) / Camlock:**

Either a male or female fitting on the end of a valve or hose that allows for easy and quick hose connection.

**Service Equipment:**

The filling and discharge, pressure relief, heating and heat-insulating devices and measuring devices on an IBC.

**Valve Adapter:**

A steel or plastic adapter that will take the end of a valve and convert it to a different type of end to match up with dispensing equipment.

**Viton:**

A brand of synthetic rubber and fluoropolymer elastomer commonly used in O-rings and other molded or extruded goods.

## Find It Fast!

Absorbents	12
Adapters	4
Blanket Heaters	11
Chemical Tanks	1
Covers	6
Funnels	10
Gaskets	9
Hose Kits	8
Hose & Couplings	8
Insulator Quilt	12
Mixers	13
Replacement Parts	
Bottles	4
Caps	5, 6, 7
Dust Covers	7
Liners	5
Marking Plates	7
Plugs	5, 6
Valves	4, 5, 7
Samplers	10
Scales	10
Seals	8
Spill Containment	13
Tanks	1
Wrenches	9

# IBCs & Chemical Tanks

## Intermediate Bulk Containers

**"Save space and Money by using IBC tanks for storage and shipping!"**

- Rigid, welded galvanized tubular steel cage
- 275 and 330 gallon fill capacity
- UN Rated for Packing Group II and III, UN 31HA1/Y1.9

Gain the greatest possible volume while minimizing space with this easy to fill, easy to stack and easy to load intermediate bulk container. It's the best solution for transporting and storing the widest range of chemicals and food grade products. Food grade products require a new inner tank with new valve, caps and gaskets.

Part No.	Description	Wt.	Each
B1-SM13275	275 gal. w/composite pallet	133 lb.	\$235.00
B1-SM15275	275 gal. w/poly pallet	133 lb.	\$258.00
B1-SM13330	330 gal. w/composite pallet	160 lb.	\$249.00



B1-SM13275

## TranStore® Advanced Technology Metal IBC

- Meets UN Standard 31A
- Choice of carbon steel or stainless steel

The ultimate in returnable, reusable bulk packaging. All-welded 10 gauge metal tanks have patented sloped bottom for uniform and complete drainage. 1/4" thick combination lift lugs/leg positioners for international and domestic shipments. Stacks three high. 22 1/2" diameter fill opening. Supplied with cover, EPDM gasket and bolt ring. Equipped with 2" NPS brass or stainless steel ball valve

**Optional: 2" or 3" fusible vent in center of cover available.**

Part No.	Capacity	Dim. (L x W x H)	Type	Wt.	Each
B1-CMSS350	350 gal.	42" x 48" x 47"	Stainless Steel	496 lb.	Call for price
B1-CMCS350	350 gal.	42" x 48" x 47"	Carbon Steel	460 lb.	Call for price
B1-CMSS550	550 gal.	42" x 48" x 71"	Stainless Steel	645 lb.	Call for price
B-1CMCS550	550 gal.	42" x 48" x 71"	Carbon Steel	630 lb.	Call for price



B1-CMCS350

## Chemical Storage Tanks

- Corrosion-resistant polyethylene is reusable and recyclable
- Available in 8 standard colors for foolproof product identification
- FDA and USDA Compliant

Durable tanks are UV-resistant one-piece seamless linear low density polyethylene, FDA and USDA compliant for direct contact with food products. Ideal for indoor or outdoor use. 1/4" thick wall is translucent for easy product level viewing. Other sizes available up to 5000 gallons.

**VTS-Series Tank** has completely flat bottom for easy mounting. Has 7" diameter fill cap. Fits on 48" x 48" pallet. \*2" NPS bulkhead fitting available upon request. Order ball valve separately.

**GUZ-Series Tank** is all polyethylene with integral 2-way fork entry base. Fill opening is 22-1/2" diameter, has standard drum-type cover and lever-latch ring. Supplied with 2" NPS ball valve. Designed to fit on 48" x 48" pallet.

**Standard color is natural.**

\*Must specify 2" bulkhead fitting for VTS-Series

Part No.	Capacity	Diameter x Height	Wt.	Each
B1-80VTS*	80 gal.	23-1/2" x 44"	30 lb.	\$168.70
B1-120VTS*	120 gal.	28-1/4" x 53"	40 lb.	\$212.70
B1-160VTS*	160 gal.	33" x 40-3/4"	50 lb.	\$264.05
B1-175VTS*	175 gal.	28-1/4" x 74"	57 lb.	\$308.05
B1-190VTS*	190 gal.	34" x 55"	57 lb.	\$315.40
B1-250VTS*	250 gal.	34" x 74"	65 lb.	\$337.35
B1-300VTS*	300 gal.	46-1/2" x 48"	80 lb.	\$425.40
B1-500VTS*	500 gal.	46-1/2" x 75"	120 lb.	\$674.70
B1-GUZ300	300 gal.	48" x 55"	290 lb.	\$699.45
B1-GUZ500	500 gal.	48" x 82"	350 lb.	\$1,004.75





VTS SERIES

GUZ SERIES

# IBC & Parts Diagram



# IBC Valves & Accessories Diagram

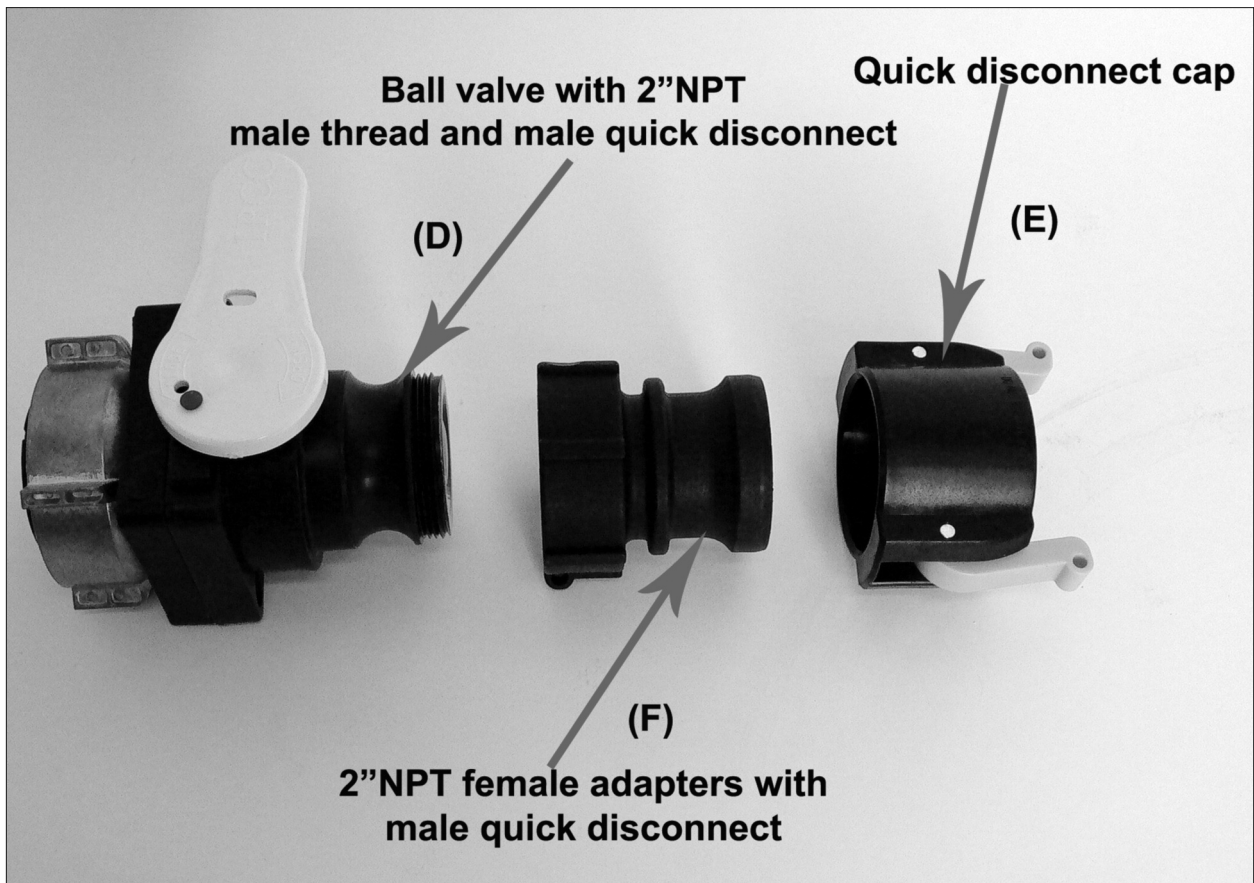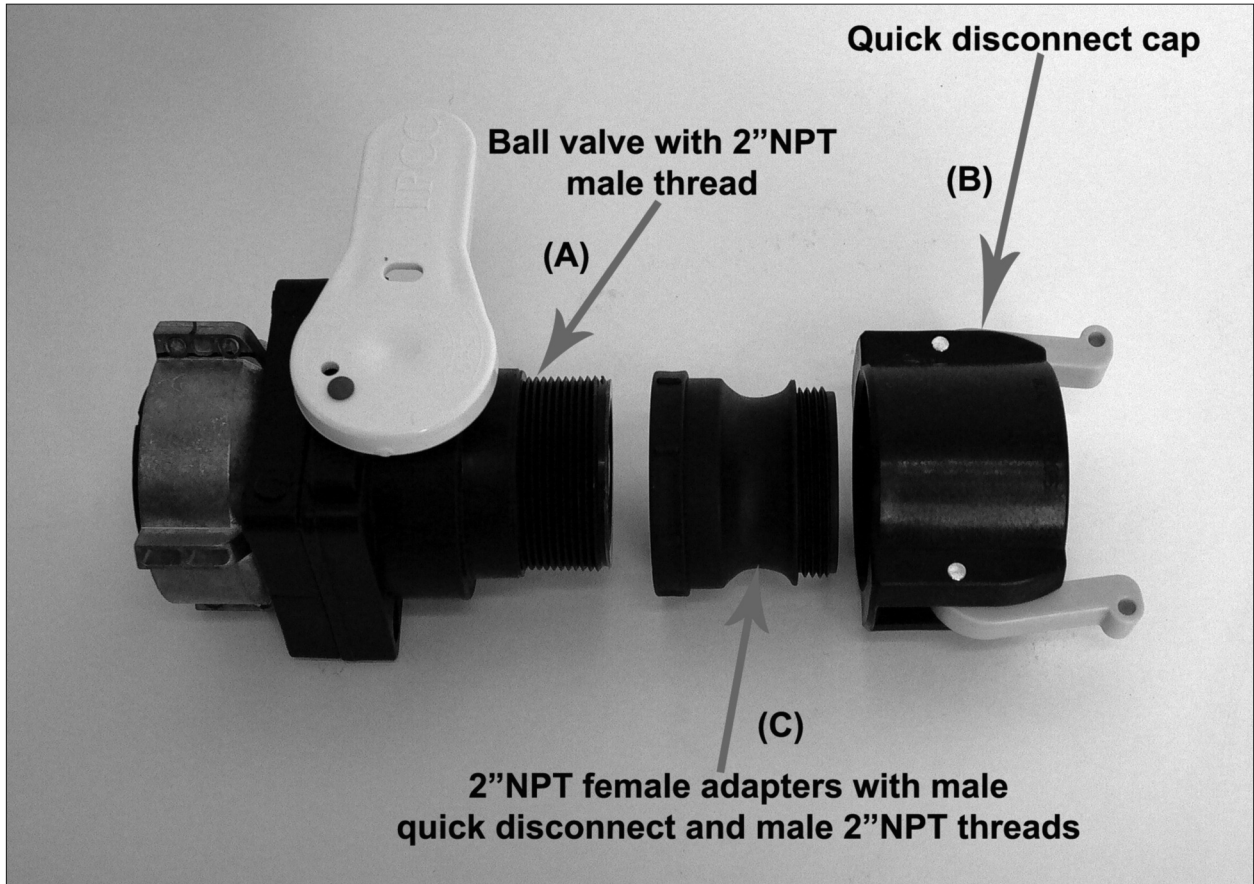

# IBC Ball Valves, Adapters & Bottle

## Polypropylene IBC Ball Valves

- All polypropylene screw-on nut for easy connection to IBC
- Choice of NPT or Quick Disconnect (QD) adapter at the outlet

Highest-quality bolted-design valves have nylon collar and foil seal over 2" NPT outlet. Large, easy-to-operate handle. All valves have been tested and passed with UN rated IBCs and will allow controlled flow of product from IBCs.



Part No.	Gasket	Outlet	Container Mfg.	Wt.	Each	3 Each	6 Each
B1-BV2NCN-E	EPDM	2" male NPT	Schutz® and Clawson S75	1.5 lb.	\$14.80	\$13.50	\$12.00
B1-BV2CLCN-E	EPDM	2" male QD Coupler	Schutz® and Clawson S75	1.5 lb.	\$14.80	\$13.50	\$12.00
B1-BV2CLCN-V	VITON	2" male QD coupler	Schutz®	2 lb.	\$15.80	\$14.00	\$12.50
B1-PBVHMTXFT2	EPDM	2" NPT male	Mauser®	1.5 lb.	\$14.80	\$13.50	\$12.00
B1-PBVHMAXFT2	EPDM	2" male QD coupler	Mauser®	1.5 lb.	\$14.80	\$13.50	\$12.00
B1-PBVHMAXFC02	VITON	2" male QD coupler	Mauser®	2 lb.	\$15.80	\$13.50	\$12.00
B1-PBVHMTXFC02	VITON	2" NPT male	Mauser®	2 lb.	\$15.80	\$13.50	\$12.00
B1-BV2NCN-V	VITON	2" NPT male	Schutz®	2 lb.	\$15.80	-	-
B1-CFH/20C/027	-	Quick disconnect dust cover	Coupler	.29 lb.	\$9.20	\$8.60	\$6.35

## Polypropylene IBC Adapters

- Made of polypropylene
- Adapters available for female x male or male x male
- Helps achieve easy no-mess discharge from IBCs



Part No.	Size	Fits	Wt.	Each	3 Each	6 Each
B1-A2BFCLCM2	2" Short Female Buttress x 2" Male Quick Disconnect	Buttress Valves	0.13 lb.	\$6.40	\$6.00	\$4.45
B1-A2NFCLCM2	2" Short Female NPT x 2" Male Quick Disconnect	NPT Valves	0.13 lb.	\$6.40	\$6.00	\$4.45
B1-A2BF2NM	2" Female Buttress x 2" Male NPT	Buttress Valves	0.25 lb.	\$8.85	\$8.30	\$6.10
B1-A2NFMQD	2" Female NPT x 2" Quick Disconnect	NPT Valves	0.22 lb.	\$4.15	\$3.90	\$2.90
B1-A2MQD2MN	2" Male NPT x 2" Quick Disconnect	Female NPT Valves	0.23 lb.	\$6.10	\$5.75	\$4.25

## Composite IBC Replacement Bottles



- 275 gallon capacity
- Fill opening is 6" with screw cap
- 2" ball valve w/Viton gasket and QD outlet
- Made of FDA approved material

Instead of disposing of your Composite IBC when your bottle is damaged or impossible to clean, replace the bottle with our new IBC bottles.

**Note:** Call for large volume pricing



Part No.	Description	Dim. (LxWxH)	Wt.	Each
B1-IBCBOT-275	Replacement Bottle	47.25" x 39.375" x 39.375"	36 lb.	\$90.00

# IBC Replacement Parts

## IBC Replacement Parts to Help Meet EPA's PCC Rule



- One way check valves
- Choice of NPT or Quick Disconnect

IBC replacement parts will help you comply with the EPA's Pesticide Container and Containment Rule for refillable containers.

### One Way Check Valve for IBCs

Part No.	Container Mfg.	2" Outlet	Gasket	Each
B1-BCVGFN-V	GREIF®	NPT	VITON	\$17.50
B1-BCVGFQD-V	GREIF®	QD	VITON	\$17.50
B1-BCVSCTN-V	SCHUTZ®	NPT	VITON	\$17.50
B1-BCVSCTQD-V	SCHUTZ®	QD	VITON	\$17.50
B1-BCVMAN-V	MAUSER®	NPT	VITON	\$17.50
B1-BCVMAQD-V	MAUSER®	QD	VITON	\$17.50



### Tamper Evident Plug for Manual Venting

- Keeps valuable product safe
- Vents when plug is opened
- Tamper evident to comply with new EPA regulations

Part No.	Color	Description	Each
B1-2TEP6C	Green	2" tamper evident plug for 6" cap for manual venting	\$5.00




### IBC Liner

- Reduce the number of bottle replacements
- IBCs no longer will need to be triple-rinsed or cleaned to meet EPA rules
- Double barrier creates a more durable package
- Provides a contaminant-free virgin skin with each use
- Composite liner fits Schutz®, Greif®, Varicon and Mauser® systems

The IBC liner can reduce the cost of cleaning your IBC and allows you to replace the liner instead of replacing the bottle in composite IBCs. The IBC liner for stainless and carbon steel IBCs helps you reuse your container over and over with minimal cleaning.

Part No.	Description	Wt.	Each
B1-IBCLCOMP-275	275 gallon liner for composite IBC	1.4 lb.	\$42.00
B1-IBCLSS-330	330 gallon liner for stainless and carbon steel IBC	1.6 lb.	\$48.00

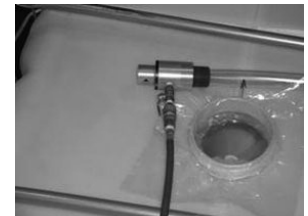

B1-IBCLCOMP-275

### 6" Polyethylene Fill Caps

- Buttress threads fit most plastic IBCs

Precision molded black/blue polyethylene screw caps replace original equipment on plastic IBCs.

**Black Standard Cap** has plain top without fitting.

**Black Plug-Type Cap** has 2" NPS opening in center with a solid polyethylene plug.

**Black Plug-Type Vent Cap** has 2" vent plug with PTFE membrane. Provides both pressure and vacuum relief.

**Blue Plug-Type** has 2" NPT and 2" Buttress polyethylene plug.

**Tamper Evident Plug** fits a 2" Buttress opening.

B1-PBC6S



B1-PBC6PV



Part No.	Description	Size	Wt.	Each	6 Each	11 Each
B1-PBC6S	Black standard cap	6"	.4 lb.	\$8.25	\$7.05	\$6.25
B1-PBC6PS	Black plug-type cap	6"	.4 lb.	\$7.75	\$7.45	\$6.80
B1-PBC6PV	Black plug-type vent cap	6"	.4 lb.	\$9.20	\$8.50	\$7.80
B1-78D	Blue plug-type	6"	.4 lb.	\$8.65	\$8.00	\$7.45
B1-PBC6BP	Blue cap w/2" Buttress plug	6"	.4 lb.	\$7.50	\$6.90	\$6.40
B1-2TEP6C	Tamper evident plug	2"	.5 oz.	\$5.00	\$4.50	\$4.00



B1-2TEP6C



B1-78D

# Covers, Caps & Valve Replacement Parts


## Poly Vent Plugs for IBCs

- Fusible and tamper-evident closure
- Built-in 2" polyethylene plug

Fusible closure melts in event of fire, releasing dangerous pressure build up inside the container. Pre-assembled unit crimps onto opening in cover, includes a 2" plug with a 3/4" reducer opening and a metal crimp ring for secure installation. A molded, pre-scored diaphragm forms a hermetic tamper-evident seal. Diaphragm has convenient pull ring for easy removal.

**Crimping Tool** easily and accurately installs closure.

Part No.	Description	Wt.	Each	3 Each
B1-FCP2	2" Poly vent plug	.25 lb.	\$19.95	\$13.30
B1-FCCT2	Crimping tool	6.5 lb.	\$537.50	\$488.30

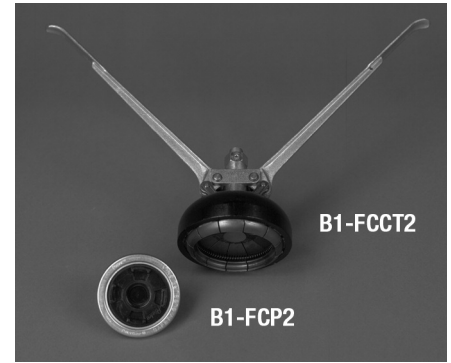

## Camlock Quick Disconnect


- Makes IBC draining fast and neat
- 316 stainless steel

High quality precision castings offer smooth Camlock operation.

**Adapter** has 2" NPT male thread and male quick disconnect.

**Dust Cover** has two sealing loops that can be locked or sealed to prevent unauthorized access. Supplied with Buna-N gasket.


Part No.	Description	Wt.	Each	6 Each	11 Each
B1-SS2QC	Camlock adapter	1.5 lb.	\$47.85	\$45.00	\$42.15
B1-SS2DC	Dust cap with gasket	1.25 lb.	\$67.95	\$64.00	\$59.95

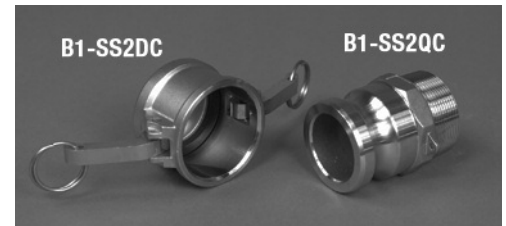

## Ball Valve Dust Caps

- Made of high density polyethylene
- Keeps dust and foreign objects out of valve assemblies during transportation or storage
- Available with NPT or buttress threads

Part No.	Color	Description	Wt.	Each	3 Each	6 Each
B1-2BC/21B/024	Black	2-1/8" shallow cap for Schutz® style valves, 1/2" deep	0.10 lb.	\$1.85	\$1.75	\$1.30
B1-C2BBK	Black	2" deep European Buttress dust cap, 1" deep	0.10 lb.	\$3.45	\$3.25	\$2.40
B1-BVC2NPT	Black	2" deep dust cap for valve, 1" deep	0.10 lb.	\$1.85	\$1.75	\$1.30
B1-2BC/20NS/024	Black	2" shallow dust cap for valve, 1/2" deep	0.10 lb.	\$1.80	\$1.70	\$1.25
B1-CFH/20C/027	Black w/yellow arms	2" polypropylene quick disconnect cap for QD outlet	0.29 lb.	\$9.20	\$8.60	\$6.35

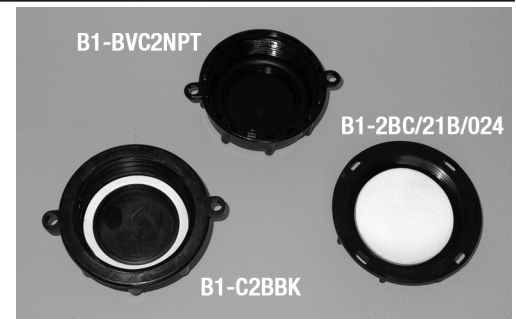

## Covers for Stainless Steel Intermediate Bulk Containers

- 22" diameter
- 304 stainless steel

We have the right lid for your stainless steel IBC. Highest quality 304 stainless steel with 2B finish. Fits IBCs with drum-type openings.

**Flat Lid** is plain with no fitting.

**Nipple Cover** supplied with 3" Girard nipple to accept fusible vent cap (order separately).

**Poly Vent Cover** supplied with 2" poly vent closure installed.



Part No.	Description	Wt.	Each
B1-SS2RVL	Poly vent cover	8 lb.	\$82.60
B1-SS3GVL	Nipple cover	9 lb.	\$84.00
B1-SSFL	Flat lid	8 lb.	\$54.10

# Replacement Parts

## IBC Replacement Parts for Valves



- Replacement gaskets for Greif®, Mauser® and Schutz® valves
- Gaskets available in EPDM or Viton
- Foil Seals can be put on all valves that you repair

The IBC replacement parts allow you to repair and reuse your valves.

Part Number	Description	Material	Each
B1-2FS	2" replacement foil seal for valve	-	\$0.57
B1-G2-E-MA	Greif®/Mauser® valve gasket	EPDM	\$1.15
B1-G2-V-MA	Greif®/Mauser® valve gasket	VITON	\$2.30
B1-GSCT2-E	SCHUTZ® replacement gasket	EPDM	\$1.15
B1-GSCT2-V	SCHUTZ® replacement gasket	VITON	\$2.55



B1-2FS

## Fusible IBC Vent Cap

Protect your IBC from dangerous overpressure conditions. Meets UN standards for venting. 316 Stainless Steel. 3" fusible cap melts at fire temperatures, provides 8.295 square inches of venting area. Hydrostatically tested to 75 psig. Supplied with PTFE gasket. Safety cable is included and retains plug during filling and draining operations. 14-1/2" cable for convenient attachment to the container.

psig = pounds per square inch gauge

Part No.	Description	Wt.	Each
B1-FCSS3	3" vent cap	2 lb.	\$50.10
B1-TG3FC	Replacement PTFE gasket	1 oz.	\$1.60



B1-FCSS3


## Metal IBC Ball Valves

- 2" NPT Unibody design
- Choice of 304 stainless steel or bronze construction

Precision investment cast valves have reduced port design with solid ball and blowout-proof stem. PTFE seats and seals. 1000 psi WOG. Extra long low-profile plastic covered handle. Handle can also be locked and sealed against unauthorized access.

WOG = Water, Oil and Gas

Part No.	Description	Wt.	Each
B1-VSSBV2	Stainless Steel	3.50 lb.	\$39.90
B1-BBV2	Bronze	3.50 lb.	\$50.90

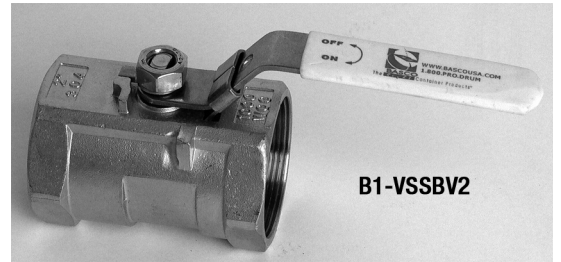

B1-VSSBV2

## IBC Replacement Marking Plate



- Made of all plastic material
- Fits Mauser®, Schutz®, Greif® and Varicon cages
- All black in color; gray is available

IBC replacement marking plate allows your customers to put their product information on cleanly and easily.

Part No.	Description	Material	Wt.	Color	Each
B1-MP-MASCT1828B	18" x 28" marking plate	Plastic	2 lb.	Black	\$4.97



## IBC Dust Cover



- Cover your IBC to keep them dust and particle free
- Available for 275 or 330 gallon IBC
- Sold in roll quantities

Part No.	Description	Mil.	Dim (W x D x L)	Roll Qty.	Roll Wt.	Roll Price
B1-IBCB-514973	275 gallon cover	1.5 mil	51" x 49" x 73"	75 bags	45 lb.	\$97.45
B1-IBCB-484672	330 gallon cover	1.5 mil	48" x 46" x 72"	75 bags	55 lb.	\$104.65



B1-IBCB-484672

# Seals & Hoses

## Plastic Pull-Tight Seal



- Ideal for drums, valves, totes and general use
- Made of high density polypropylene co-polymer
- 50 lb. breaking strength; 8" strap length

Thread strap through closure and into the locking chamber marked "INSERT HERE" and pull seal through until snug. Seal strap fits through any closure larger than 5/32" in diameter. Overall dimensions: 9-7/8" L x 1-1/8" W.

Part No.	Description	Wt.	Each
B1-SEL9001	Plastic pull-tight seal	11 lb.	\$0.25

## Economical Plastic Mini-Padlock Drum Seal

- Perfect for plastic or fiber leverlock drums
- Can't be opened without breaking
- Installs quickly without tools

Easy-to-use one-piece seal is 100% Delrin®, won't rust or corrode. Strong shank fits through 1/8" diameter hole, collar and fully enclosed body prevents tampering. Custom decoration, sequential numbering and other colors available. Call Customer Service at 1.800.776.3786 for details.



Part No.	Description	Color	Wt. Per 1000	Each
B1-PL8R	Mini-Padlock Seal	Red	3 lb.	\$.16

## Industrial Hose and Couplings

BASCO's line of GOODYEAR hose allows you to dispense out of your tank with ease. We carry chemical (CHEMHOSE), food (FOODHOSE) and petroleum (PETROHOSE) hose that will fit your IBC or tanks.

- Order hose length needed for your application
- Choose the two end couplings you require
- All hose are made by GOODYEAR
- All hose 2" diameter, special size or material available on request

**Hose:** Choose length and hose type

Part No.	Description	Price/FT
B1-CHEMHOSE	2" synthetic rubber cross linked polyethylene w/ green synthetic rubber cover	\$13.95
B1-FOODHOSE	2" synthetic rubber FDA & Sanitary standard compliant w/white synthetic rubber cover	\$16.35
B1-PETROHOSE	2" synthetic rubber Nitrile rubber w/black and orange synthetic rubber cover	\$9.75

**Coupling:** Choose two coupling ends

Part No.	Description	Assembly	Price per end
B1-ALC200	2" aluminum hose shank x 2" female QD	Aluminum band couple	\$14.65
B1-ALE200	2" aluminum hose shank x 2" male QD	Aluminum band couple	\$11.30
B1-SSC200	2" SS hose shank x 2" female QD	SS band couple	\$41.15
B1-SSE200	2" SS hose shank x 2" male QD	SS band couple	\$35.60
B1-PPE200	2" polyethylene hose shank x 2" male NPT	Aluminum band couple	\$10.60
B1-PPC200	2" polyethylene hose shank x 2" female QD	Aluminum band couple	\$17.90
B1-GTM200SS	2" SS hose shank x 2" male NPT	Coupling w/crimped ferrules	\$58.40

### B1-CHEMHOSE



Shown with B1-SSC200 & B1-SSE200

### B1-FOODHOSE



Shown with B1-SSC200 & B1-SSE200

### B1-PETROHOSE



Shown with B1-ALC200 & B1-ALE200

## IBC Gravity Feed Hose Kit

*Let the natural force of gravity do the work*

- Requires no electricity or air source; includes hose, adapter and nozzle
- 120°F max. temperature, 1,000 cps max. viscosity
- Kits with polypropylene nozzles are ideal for use with DEF

Kits include 8' of wire reinforced braided PVC hose with stainless steel permanent clamps, 1" O.D. aluminum or polypropylene nozzle with Viton o-ring and hanger clip. The appropriate 2" female NPT or 2" female Buttress (60 x 6 threads) or 2" Camlock adapter is also provided. **Note:** Camlock valves should use Camlock IBC kits. 2" female NPT and 2" Buttress adapters are for use with fully threaded IBC valves, not with the 2" dust cap threads typically found on the end of a 2" Camlock. **Optional Extension Hose** fits all kits and uses quick cam setup to instantly attach an additional 8' of hose.

Part No.	Description	Nozzle	GPM	Wt.	Each
B1-IBCHK8P2F	IBC kit, 2" Female NPT	Polypropylene	8	.6 lb.	\$121.25
B1-IBCHK8A2F	IBC kit, 2" Female NPT	Aluminum	10	6 lb.	\$139.20
B1-IBCHK8P2FB	IBC kit, 2" Female Buttress	Polypropylene	8	6 lb.	\$122.50
B1-IBCHK8A2FB	IBC kit, 2" Female Buttress	Aluminum	10	6 lb.	\$140.85
B1-IBCHK8P2C	IBC kit, 2" Camlock	Polypropylene	8	6 lb.	\$144.20
B1-IBCHK8A2C	IBC kit, 2" Camlock	Aluminum	10	6 lb.	\$157.50
B1-HK8EXT	Optional 8' extension hose	-	-	5 lb.	\$68.35



B1-IBCHK8P2C

# IBC Wrenches & Gaskets

## Combination IBC Fill Port Cap Wrench

**DrumRight™**

*Versatile tool eases common IBC jobs*

- Fits popular IBC fill port caps
- Also opens most 2" and 3/4" steel drum plugs
- All welded steel construction for durability

Don't struggle with awkward cap tightening. This combination wrench tightens and loosens IBC caps and the vertical cap grabber ends double as wrenches for 2" and 3/4" steel drum plugs. Use with a 3/4" socket (not included) and manual torque wrench (listed below) to comply with DOT closing requirements for the IBC fill port cap.

**Be sure to follow the manufacturer's closing instructions** to be in compliance with the container torque requirements.




Part No.	Description	Wt.	Each
B1-IBCW6	6" IBC combination wrench	3.2 lb.	\$90.00
B1-IBCW9	9" IBC combination wrench	3.2 lb.	\$95.00
B1-IBCWS	Snyder IBC combination wrench	4.2 lb.	\$97.50
B1-IBCWB	Bonar IBC combination wrench	4.2 lb.	\$97.50
B1-TR3015	Adj. torque wrench, 1/2" drive, 30-150 ft. lb.	2.5 lb.	\$230.35

## Adjustable IBC Fill Port Cap Wrench

- Use with 1/2" drive torque wrench to maintain DOT requirements
- Fits all 6" to 9" fill port caps on Composite IBCs

Adjust the stainless steel pins to fit the fill port cap by moving them in or out along the slots on the aluminum bar and maintain the adjustment by tightening the zinc plated steel wing nuts.

**Be sure to follow the manufacturer's closing instructions** to be in compliance with the container torque requirements.

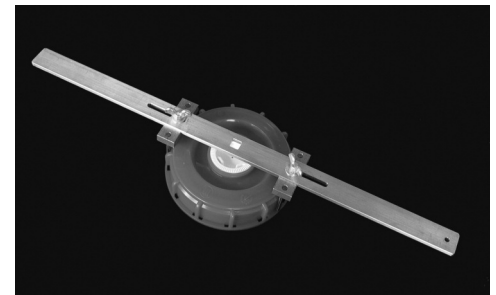

Part No.	Description	Wt.	Each
B1-STN1BCSW	Adjustable fill port cap wrench	3 lb.	\$140.00


## IBC Valve Wrenches

*Make short work of IBC valve replacement*

- Fits popular IBC valves
- Accepts 1/2" square drive extension

Don't fight the job with ordinary wrenches – this unique steel wrench gets into the tight space around most IBC valves. Snugs up the valve collar after hand tightening the valve into the IBC. 1/2" drive extension acts as a wrench handle to turn the collar.



Part No.	Color	Fits Valve - with IBC Bottle	Collar Size	Wt.	Each
B1-STNVRR	Red	Banjo - Hoover and Mauser Replatainer Schutz with plastic collar - Schutz	2-1/8"	1 lb.	\$70.75
B1-STNVRW	White	Banjo or Schutz with metal collar - Schutz and Clawson	2"	1 lb.	\$70.75
B1-STNVRY	Yellow	Banjo or IPCC - Greif SL5/SL7, Mamor/Mauser	1-1/2"	1 lb.	\$70.75

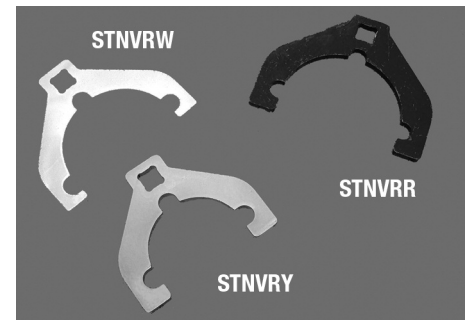

## Multiseal™ Gasket for Steel IBC

- Delivers the maximum sealing power
- Ideal for air - sensitive products

This contour-fitting IBC gasket fits onto the top of the steel IBC, not the cover. It puts maximum sealing material between the lid and the cover, totally filling the gasket cavity. Its long leak path keeps product in and air out. Closed-cell foam rubber insures air-tightness, even if the surface skin is cut or torn. No messy adhesive is required.

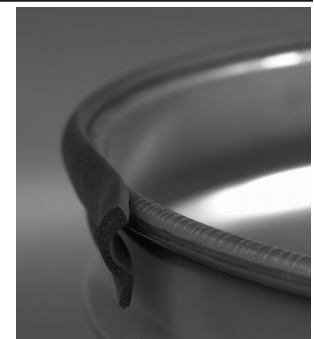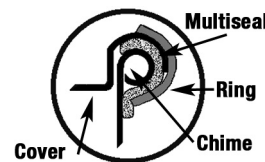

Part No.	Description	Wt. Per 1000	Each	25 Each
B1-55MS-EPDM	EPDM Multiseal™	260 lb.	\$3.06	\$2.36
B1-55MS-TC	PTFE Coated Multiseal™	260 lb.	\$13.65	—
B1-55MS-VC	Fluorolast® Coated Multiseal™	260 lb.	\$35.40	—

# IBC Samplers, Funnel & Scale

## Polypropylene Coliwasa Sampler

- Patented, EPA referenced sampler
- Superior chemical and breakage resistance
- Ideal for most sampling needs

These durable **Coliwasa Samplers** are made of see-through polypropylene for superior resistance to chemicals and breakage. Neoprene stoppers with TFE film coating on top and bottom for improved safety, stick resistance and sample transfer (sampler can serve as a container for non-hazardous samples). Take representative samples from top to bottom of buckets, drums, tanks and tankers. Handles liquids, slurries, sludge and semi-solids. Resists acids, alkalies, hydrocarbons, ketones, aldehydes, esters, oxidizers and glycols.

**Optional Coupler Set** combines two sections of 1" Coliwasa to increase sampler length and compatibility of application.

**Optional Purge-Squeegee Kit** allows rapid and neat emptying of viscous samples. Avoids spillage and helps to decontaminate while automatically cleaning the inside and outside of the sampler tube.

B1-CSB10045



Part No.	Description	Capacity	Dim. (I.D. x L)	Min. Order	Wt.	Each
B1-CSB10045	Sampler for IBC	530 ml	1" x 45"	10	1 lb.	\$19.55
B1-CST91670	Sampler for Tanks	230 ml	9/16" x 70"	10	1 lb.	\$32.60
B1-CST10070	Sampler for Tanks	830 ml	1" x 70"	10	1 lb.	\$32.60
B1-CST10088	Sampler for Tank Wagons	1043 ml	1" x 88"	10	1 lb.	\$37.50
B1-CS100	Coupler Set for 1" I.D.-Coliwasa	—	—	5	1 lb.	\$26.10
B1-SPP70	Purge-Squeegee Kit for Tanks	—	—	5	1 lb.	\$41.25
B1-SRP100	Squeegee Refill	—	—	10	1 lb.	\$16.00

## IBC Burp-Free Funnel

*Get rid of slow and splashing liquid transfers – forever!*

- Eliminates "burping" back splashing
- 100% polyethylene with padlockable hinged lid
- 5 gallon capacity
- Screws into 2" NPS opening

Resists corrosion, rust and most chemicals. Use on any steel or plastic IBC that has a cap fitted with a 2" NPS center plug.

Part No.	Description	Dim. (Dia. x H)	Wt.	Each
B1-PF0656	Screw-in IBC funnel	22" x 11-1/2"	8 lb.	\$105.75

**NOTE:** This funnel is not to be used if you must comply with closed container regulations.



## Pegasus Floor Scale System

- Accurate, reliable and affordable
- Low profile height of only 3.1 inches
- 48" x 48" deck with 5,000 lb. capacity
- No installation required
- Optional ramp available below

Pegasus floor scales are designed for use in a wide range of industrial weighing applications up to a capacity of 5,000 lb. Ruggedly constructed of mild steel with a 1/4" thick top plate. Hard wearing powder coated paint finish. Features bottom access J-box, top access leveling foot and eye bolt threads. This scale is equipped with an indicator that is pre-calibrated with the scale. Simply plug it in and start weighing.

**System SDCS48-B** is NTEP approved and is suitable for most legal-for-trade applications. The scale is fitted with 1.75" adjustable leveling feet and four NTEP approved nickel plated alloy steel potted loadcells. 200E LED indicator is pre-calibrated with the floor scale to 1:5000 divisions.

**Optional ramp** includes two straight ramp attachment brackets for hooking into the side of the scale.

Part No.	Description	Wt.	Each
B1-SDCS48-B	H-D floor scale NTEP	270 lb.	\$1,191.95
B1-SDCS-RMP	Ramp 48" x 36"	220 lb.	\$346.30



B1-SDCS48-B

# IBC Heaters

## Blanket Heater for Plastic IBC



*Efficiently puts heat into your IBC – and keeps it there*

- Won't harm plastic IBCs
- Choice of single or dual zone heating
- Operates on 110V AC power
- CE (Community European) certified conforms to EC (European Commission) standards

These high-efficiency IBC blanket heaters have a silicone-insulated spiral-wound resistance element housed in a composite nylon-coated woven fiberglass jacket. Both heaters are equipped with four pairs of easy-connect buckles and straps for easy attaching and removal. CE certification is recognized in the USA.

**IBC1 Single Zone Heater** has a heating element housed in the lower two thirds of the unit. It is designed for winter warming applications up to 104° F. Heats liquid 1° F-5° F/Hour. Adjustable jacket 160"-169.5" L x 37-1/2"H.

**IBC2 Dual Zone Heater** has an upper and lower heating element designed for faster heating up to 140° F. Adjustable jacket 160"-169.5" L x 37-1/2" H.

**IBC1-2LID Optional Insulated Lid** helps to contain heat for added efficiency.

**IBC1-2WPC Optional Waterproof 2-Piece Cover** protects heaters from moisture and allows blanket heaters to be used outdoors under general weather conditions. Withstands temperatures to 0° F. Includes center flap for fill port access. Made of 0.5mm PVC coated polyvinyl. Color is bright orange.

**Note:** When ordering your heater, be sure to state your container's dimensions and type.



**B1-IBC2  
Shown with  
IBC1-2LID**

Part No.	Description	Temp. Range °F	Volts	Watts	Amps	Wt.	Each
B1-IBC1	Single Zone, fits 275 & 330 gal IBC	32 – 104	120	1300	10.83	29 lb.	\$1,235.75
B1-IBC2	Dual zone, fits 275 & 330 gal IBC	32 – 140	120	2200	18.33	33 lb.	\$1,950.00
B1-IBC1-2LID	Optional insulated lid	–	–	–	–	5 lb.	\$200.00
B1-IBC1-2WPC	Optional waterproof cover	–	–	–	–	16 lb.	\$504.30

## BASCO Hazardous Area Blanket Heater for Plastic IBCs



*Heats efficiently and safely in flammable and explosive areas!*

- Designed for use with 275 gal. plastic IBC in a metal cage
- Good for Class 1 Division 1 & Class 1 Division 2 areas
- Operates on 240V or 120V AC power
- CE, ATEX, IECEx certified

BASCO's Hazardous Area Blanket Heater is ATEX and IECEx Certified for Zone 1 and Zone 2 use in flammable and explosive areas equal to Class 1 Division 1 and Class 1 Division 2 environments in the USA. This high-efficiency IBC blanket heater will bring your liquids up to temperature without harming your plastic IBC. Constructed with custom elastomer and silicone coated glass cloth materials and high density fiberglass insulation. The heating medium uses a patented technology of positive temperature coefficient membranes. Safe operating conditions are maintained even in the presence of potentially explosive gases. Maximum temperatures up to 130° F (55° C) can be achieved when used with Optional IBC1-2LID Insulated Lid and standard 240V. No transformers are required. If using for freeze protection applications, a maximum temperature of 86° F (30° C) can be achieved when used with Optional IBC1-2LID Insulated Lid and standard 110V. Power cord supplied open ended to facilitate plant wiring. Adjustable jacket 160"-169.5" L x 37-1/2"H.

**IBC1-2LID** Optional Insulated Lid (black) helps to contain heat for added efficiency.

**Important:** InteliHeat IBC1HAZ is certified for use with the Insulated Lid IBC1-2LID only. It cannot be completely covered by any other cover, as this would alter its temperature certifications.



**B1-IBC1HAZ**

Part No.	Description	Temp. Range °F	Volts	Watts	Amps	Wt.	Each
B1-IBC1HAZ	Hazardous area heater for 275 gal IBC	up to 130	240	2300	9.5	45 lb.	\$4,920.00
B1-IBC1-2LID	Optional Insulated Lid	–	–	–	–	5 lb.	\$200.00

**CE (Community European)** certified to EC (European Commission) standards and recognized in the USA.

**ATEX (Atmospheres Explosibles)** European Directive on equipment and protective systems intended for use in potentially explosive atmospheres and pertains to manufacturers selling in the European Union (EU).

**IECEx** International Electrotechnical Commission System for Certification to standards relating to equipment for use in explosive atmospheres. Internationally recognized.

# IBC Insulator & Absorbents

## IBC Quilt™ Insulator

*Product already warmed up or cooled down? Keep it that way!*

- Fits 275 gallon plastic IBC in metal cage
- For transport or storage of temperature sensitive products
- Prevents freezing, heat and condensation damage
- Patented multilayer insulating technology

The quilt utilizes a layered insulating system that is designed to deliver non-mechanical thermal variation protection. Each layer is designed to act as a barrier to any of the heat transfer mechanisms, such as conduction, convection, moisture and radiation. Ruggedly built and easy to install.

**Note:** Quilt is not designed for use with heaters of any kind.

Part No.	Fits	Dim (WxLxH)	Wt.	Each
B1-DQ4275	275 gal. IBC	45" x 48" x 41"	18 lb.	\$268.50



## 95 Gallon Spill Response Fill Kits

- Absorbs over 80 gallons of spilled liquid
- All kits include protective equipment for two workers
- Use with a 95 gallon UN Rated overpack, see below

Part No.	Description	Wt	Each
B1-RK95USP-R	UniSorb™ Plus Treated Polypropylene Spill Fill Kit	58 lb.	\$318.75
B1-RK95OSP-R	OilSorb™ Plus Treated Polypropylene Spill Fill Kit	68 lb.	\$272.55
B1-RK95CSP-R	CleanSorb™ Cellulose Spill Fill Kit	124 lb.	\$253.10

Spill Kit Components	B1-RK95USP-R	B1-RK95OSP-R	B1-RK95CSP-R
3" x 48" Sock	49	49	55
15" x 19" Pad	60	60	–
16" x 18" Pad	–	–	60
10" x 10" Pillow	9	–	23
18" x 18" Pillow	9	8	–
30" x 48" .004 mil. Disposal Bag	10	10	10
12" Plastic Wire Tie	10	10	10
Warning Labels	10	10	10
Nitrile Chemical Gloves	2	2	2
Chemical Goggles	2	2	2
Tyvek™ Coverall, XL	2	2	2
Spill Kit Instructions	1	1	1



## Plastic Salvage Drums with Twist-Off Cover

- Constructed of 100% UV - protected Polyethylene
- Contain damaged or leaking containers of hazardous materials

These Salvage Drums meet Group 1 packaging standards and salvage drum regulations for containing hazardous materials including acids, corrosives and damaged parts in drums

Part No.	Size (gal.)	Color	Dual UN Rating	Int. Dim. Dia. x H (in.)	Ext. Dim. Dia. x H (in.)	Wt.	Each
B1-9618	95	Yellow	1H2/X345/S	27 x 37	32-1/4 x 43-1/4	50 lb.	\$170.80



# IBC Spill Containment & Mixers

## Ultra® IBC SpillPallet Plus®



- 360 gallon sump capacity meets EPA Container Storage Regulations
- All polyethylene construction offers excellent chemical resistance
- Forkliftable
- 8,500 lb. UDL

The low profile **Ultra IBC SpillPallet Plus®** has an overall height of just 28" which allows for safe and convenient IBC tank handling and dispensing. The large 52" x 52" deck allows for convenient placement of IBC tanks.

The **SP1158** has a drain plug that allows complete recovery of spilled liquid.

UDL = Uniformly Distributed Load



B1-SP1157

Part No.	Description	Drain Plug	Dim. (L x W x H)	Wt.	Each
B1-SP1157	IBC SpillPallet	No	62" x 62" x 28"	280 lb.	\$1,044.35
B1-SP1158	IBC SpillPallet	Yes	62" x 62" x 28"	280 lb.	\$1,117.60

## Totemaster IBC Mixers

*Specially designed turbines for containers with corners*

- Heavy-duty dual turbine mixers with shaft support bearing
- Unique mounting clamp secures adjustable bridge mount to any IBC
- Available with electric, variable speed, explosion proof, and air motors

**Direct "Totemaster" mixers** offer powerful, portable mixing for most popular tote sizes. 316 Stainless steel bridge is adjustable up to 60" wide. Collapsible turbine fits through the 6" center cap on most IBCs, are investment cast 316SS and designed to mix material in square or rectangular containers.

**TEFC and Variable Speed Electric Motor** is 115-230V, 1-Phase and ships complete with cord, plug, and on/off switch.

**EP Motor** (Explosion Proof TEFC) is 115-230V, 1-Phase and does not include a cord, plug, or on/off switch.

**Air Motor** is inherently explosion proof. Rated 5-30 CFM @ 60 PSI, 3,000 RPM

Other types and sizes are available. Call Customer Service at 1.800.776.3786 for details.



B1-5109-1000DE1D

Part No.	Motor Type	Horsepower	RPM	Shaft Dia. x Lgth.	No. of Turbines	Turbine Dia.	Wt.	Each
B1-109-1000DE1D	TEFC	1	1725	5/8" x 36"	2	5"	71 lb.	\$1,468.00
B1-5109-1000DV1D	Variable Speed	1	0-1725	5/8" x 36"	2	5"	76 lb.	\$2,181.00
B1-5109-1000DX1D	EP	1	1725	5/8" x 36"	2	5"	94 lb.	\$1,863.00
B1-5109-1000DA0D	Air	1	0-3000	5/8" x 36"	2	5"	53 lb.	\$1,468.00

## IBC Containment & Dispensing Station

- Heavy gauge steel construction
- Helps comply with EPA, OSHA, and UFC requirements

A 10,000 lb. load capacity allows double stacking of IBC's. Large deck surface has room for additional storage. Three-piece steel grating deck is easily removable and only 29" high. "Convertible" deck allows IBC to be positioned for internal dispensing within sump area. Convenient Pail Holder shelf attaches easily to inside or outside of sump. Includes drain plug at bottom for easy cleaning and grounding screw.

The **SST-IBC-2** stores 2 IBC's side by side and has a lower profile for easier access, four piece removable grating deck is 23" high and includes 2 removeable pail holder shelves.



B1-SST-IBC-2

B1-FP-IBC400



Part No.	Description	Sump Capacity	Dim. (L x W x H)	Wt.	Each
B1-FP-IBC400	1 IBC	400 gal.	51" x 76" x 29"	625 lb.	\$1,140.60
B1-SST-IBC-2	2 IBC	400 gal.	51" x 99" x 23"	702 lb.	\$1,382.90



# BASCO

2595 Palmer Avenue  
University Park, Illinois 60484

**800.776.3786**

**[www.bascousa.com](http://www.bascousa.com)**

Using your smart phone scan the QR Code to visit the **Intermediate Bulk Containers Accessories and Replacement Parts** page online.



**REPLACEMENT BOTTLE**



**WRENCH**




**HEATER**



**DUAL FILL CAP**



**MIXER**

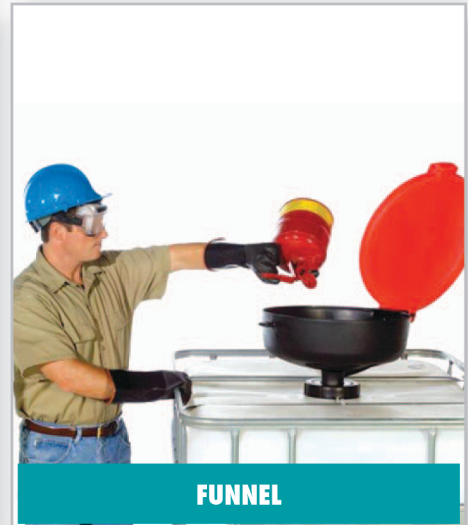

**FUNNEL**